

COMBiLiFT

LIFTING INNOVATION

Combi-CS

Counterbalanced Stacker




COMBiLiFT.com

REF	DESCRIPTION	Standard
1	Max. Lift Height	98"
2	Height Mast Closed	74"
3	Max. (Mast raised)	124"
4	Overall Length	76"
5	Ground Clearance Under Mast	3"
6	Ground Clearance to Center of Wheelbase	2"
7	Width	35"
8	Outside Spread of Fork Arms	24.5"
9	Track Front	29"
10	Load Center Distance	24"
11	Overhang Front	37.5"
12	Wheelbase	31.5"
13	Overhang Back	7"
14	Length From Face of Fork	41"
15	Fork Backward Tilt	5°
16	Fork Forward Tilt	2°
17	Minimum Outside Radius	38"
A	Capacity	1850lbs to 98" High
B	Unladen Weight	4740lbs
C	Maximum Ground Speed	4 mph
D	Gradeability	5%
E	Battery Capacity	24V / 330Ah
F	Fork Section	1.5" x 4" x 37.5"
G	Front Tire (Polyurethane)	OD 6" / Width 2"
H	Rear Tire (Vulkollan)	OD 10" / Width 3"
I	Standard Color	Yellow & Grey
J	AC Electric Traction Motor	24V / 2hp
K	AC Electric Pump Motor	24V / 6.5hp

Counterbalanced Stacker



Combi-Counterbalanced Stacker (Combi-CS), with a load capacity of 1850 lbs @ 24" Load Center, can work in the smallest operating aisles.

Equipped with our patented multi-position tiller arm the Combi-CS offers safer operation, maximum operator visibility and narrow aisle performance.

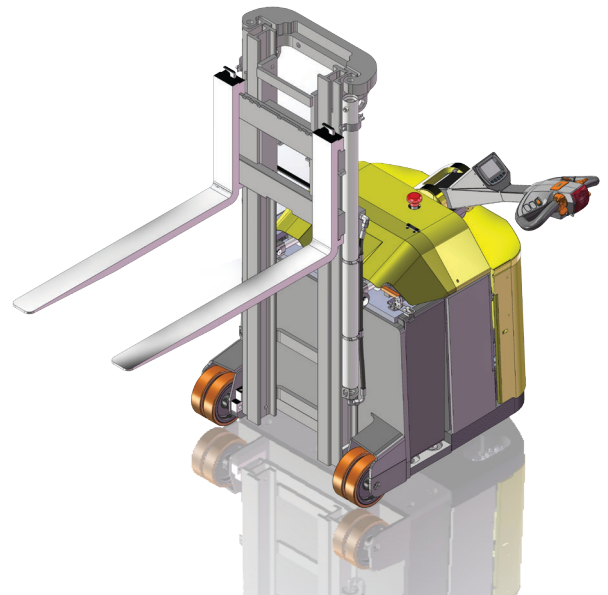

Features Include

- Power Steering
- AC Motor Technology
- Rear Wheel Drive
- International Application No. PCT/EP2012/067238 Multi Position Tiller

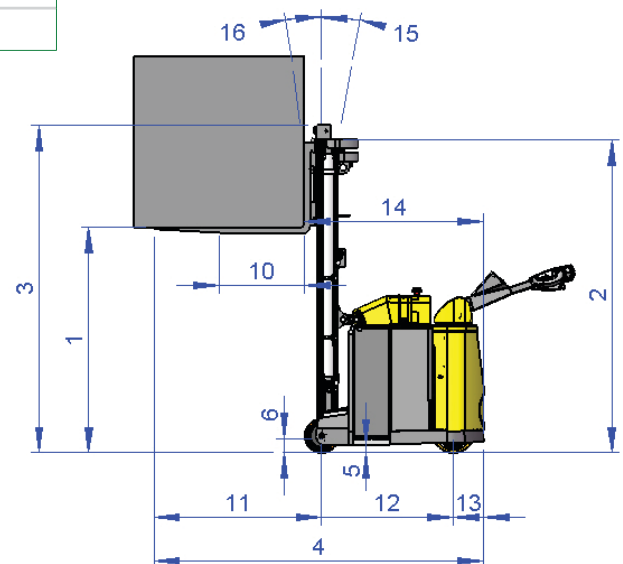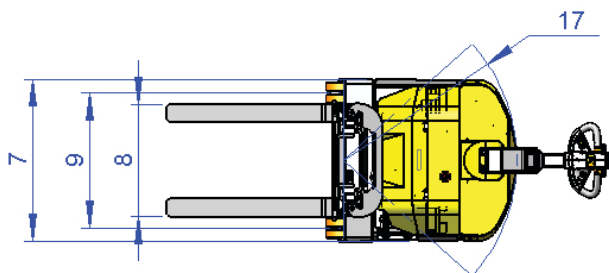

Combi-CS